

[illegible]

Stormwater Pollution Prevention – Clean Water Act Section 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres distrubed soil. Projects with any disturbed soil must protect for erosion and sedimentation.

☐ No Action Required ☐ Required Action

Action No.

1. Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
2. Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
3. Post Construction Site Notice, (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
4. When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

Work in or near Streams, Waterbodies and Wetlands Clean Water Act Sections 401 & 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- ☐ No Permit Required
- ☐ Nationwide Permit 14 – PCN not Required (less than 1/10th acre waters or wetlands affected)
- ☐ Nationwide Permit 14 – PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- ☐ Individual 404 Permit Required
- ☐ Other Nationwide Permit Required: NWP# _____

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post–project TSS.

1.

2.

3.

4.

Best Management Practices:

Erosion

- ☐ Temporary Vegetation
- ☐ Blankets/Matting
- ☐ Mulch
- ☐ Sodding
- ☐ Interceptor Swale
- ☐ Diversion Dike
- ☐ Erosion Control Compost
- ☐ Mulch Filter Berm and Socks
- ☐ Compost Filter Berm and Socks

Sedimentation

- ☐ Silt Fence
- ☐ Rock Berm
- ☐ Triangular Filter Dike
- ☐ Sand Bag Berm
- ☐ Straw Bale Dike
- ☐ Brush Berms
- ☐ Erosion Control Compost
- ☐ Mulch Filter Berm and Socks
- ☐ Compost Filter Berm and Socks
- ☐ Stone Outlet Sediment Traps
- ☐ Sediment Basins

Post–Construction TSS

- ☐ Vegetative Filter Strips
- ☐ Retention/Irrigation Systems
- ☐ Extended Detention Basin
- ☐ Constructed Wetlands
- ☐ Wet Basin
- ☐ Erosion Control Compost
- ☐ Mulch Filter Berm and Socks
- ☐ Compost Filter Berm and Socks
- ☐ Vegetation Lined Ditches
- ☐ Sand Filter Systems

III. Cultural Resources

In the event historical issues or archeological artifacts (bones, burnt rock, flint, pottery, etc.) are found during construction, cease work in the immediate area and contact the Engineer immediately.

☐ No Action Required ☐ Required Action

Action No.

1.

2.

3.

4.

5.

IV. Vegetation Resources

Preserve native vegetation to the extent practical.

☐ No Action Required ☐ Required Action

Action No.

1.

2.

3.

4.

V. Federal Listed, and Proposed Threatened and Endangered Species, Critical Habitat, State Listed Species, Candidate Species and Migratory Birds.

☐ No Action Required ☐ Required Action

Action No.

1.

2.

3.

4.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediated area, and contact the Engineer immediately.

VI. Hazardous Materials or Contamination Issues

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on–site Material Safety Data Sheets, (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act.

Maintain an adequate supply of on–site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the follwing are detected:

- Dead or distressed vegetation (not identified as normal)
- Trash piles, drums, canister, barrels, etc.
- Undesirable smells or odors
- Evidence of leaching or seepage of substances

Any other evidence indicating possible hazardous materials or contamination discoverd on site.

Hazardous Materials or Contamination Issues Specific to this Project:

☐ No Action Required ☐ Required Action

Action No.

1.

2.

3.

4.

VII. Other Environmental Issues

(Include applicable regional or site specific enviromental issues.)

☐ No Action Required ☐ Required Action

Action No.

1.

2.

3.

4.

THIS CITY OF CORPUS CHRISTI STANDARD DETAIL SHEET IS AUTHORIZED FOR USE AS APPLICABLE TO THIS PROJECT BY THE ENGINEER OR ARCHITECT WHO'S SEAL APPEARS ON THIS SHEET. THE ENGINEER/ARCHITECT AFFIRMS THAT THE DETAILS AND NOTES ON THIS SHEET HAVE NOT BEEN ALTERED OTHER THAN TO FILL IN THE PROJECT SPECIFIC INFORMATION IN THE TITLE BLOCK AND SWPPP PROJECT NOTES


CONSULTANT'S SHEET No.


**CITY of CORPUS CHRISTI
TEXAS**
Department of Engineering Services

CITY OF CORPUS CHRISTI
STORM WATER ENVIRONMENTAL PERMITS
ISSUED AND COMMENTS (EPIC) 2 of 3

SHEET _____ of _____
RECORD DRAWING NO.


CITY PROJECT # _____

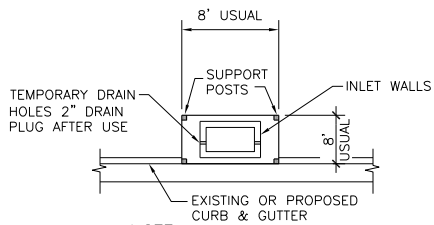

NOTE:
TYPICAL SILT FENCE INSTALLATION AT CURB INLET PRIOR TO PLACEMENT OF CURB AND INLET TOP.


CURB INLET - PLAN

NOT TO SCALE

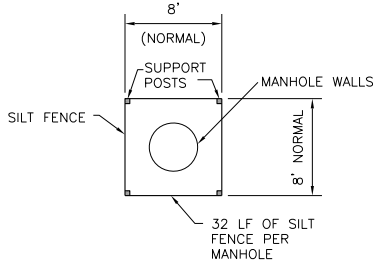

MANHOLE - PLAN

NOT TO SCALE




TEMPORARY FILTER FABRIC INLET PROTECTION DETAIL

NOT TO SCALE

NOTES:

1. FILTER FABRIC INLET PROTECTION SHALL BE USED DURING CONSTRUCTION TO CONTROL SEDIMENTATION.
2. PERIMETER SILT FENCING AROUND INLET LOCATIONS SHALL BE INSTALLED AFTER PIPE IS PLACED.
3. FABRIC MATERIAL SHALL BE A NET-REINFORCED FENCE, USING WOVEN GEOTEXTILE FABRIC.
4. FENCE SHOULD BE REMOVED UPON COMPLETION OF CONSTRUCTION.

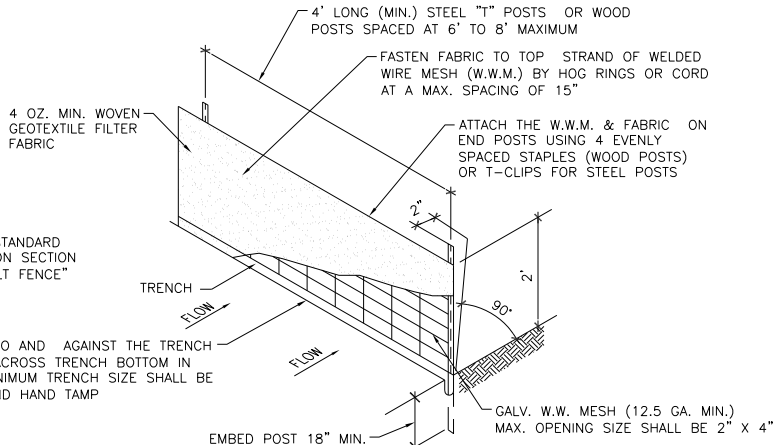

NOTE:
REFER TO STANDARD SPECIFICATION SECTION 022420 "SILT FENCE"

PLACE 6" OF FABRIC INTO AND AGAINST THE TRENCH WALL AND APPROX. 2" ACROSS TRENCH BOTTOM IN UPSTREAM DIRECTION MINIMUM TRENCH SIZE SHALL BE 6" SQUARE. BACKFILL AND HAND TAMP

SYMBOL: ---SCF---


TEMPORARY SEDIMENT CONTROL FENCE DETAIL

NOT TO SCALE

SEDIMENT CONTROL FENCE USAGE GUIDELINES:


SEDIMENT CONTROL FENCE MAY BE CONSTRUCTED NEAR THE DOWNSTREAM PERIMETER OF A DISTURBED AREA ALONG A CONTOUR TO INTERCEPT SEDIMENT FROM OVERLAND RUNOFF. A 2 YEAR STORM FREQUENCY MAY BE USED TO CALCULATE THE FLOW RATE TO BE FILTERED.
SEDIMENT CONTROL FENCE SHOULD BE SIZED TO FILTER A MAX. FLOW THROUGH RATE OF 100 GPM/FT. SEDIMENT CONTROL FENCE IS NOT RECOMMENDED TO CONTROL EROSION FROM A DRAINAGE LARGER THEN 2 ACRES.

* THE GUIDELINES SHOWN HERE ARE SUGGESTIONS ONLY AND MAY BE MODIFIED BY THE ENGINEER.

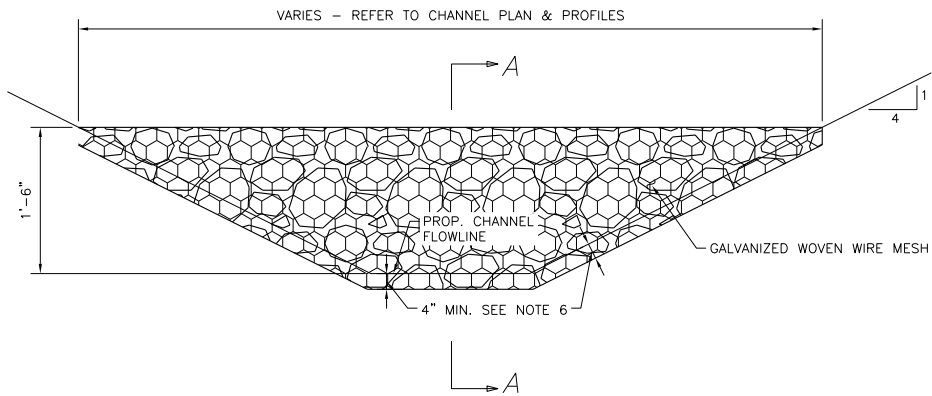

ROCK FILTER DAM AT EARTHEN BOTTOM CHANNEL

NOT TO SCALE

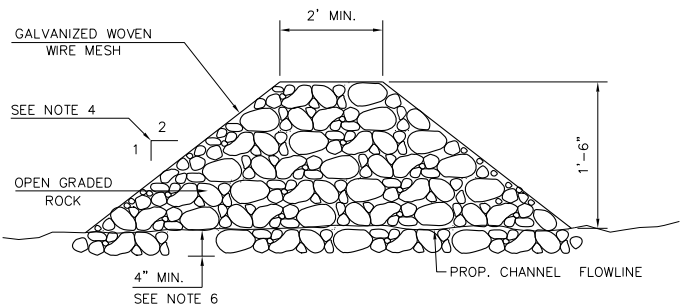


SECTION A-A

NOT TO SCALE

ROCK FILTER DAM NOTES:

1. IF SHOWN ON THE PLANS OR DIRECTED BY THE ENGINEER, FILTER DAMS SHOULD BE PLACED NEAR THE TOE OF SLOPES WHERE EROSION IS ANTICIPATED, UPSTREAM AND/OR DOWNSTREAM AT DRAINAGE STRUCTURES, AND IN ROADWAY DITCHES AND CHANNELS TO COLLECT SEDIMENT.
2. MATERIALS (AGGREGATE, WIRE MESH, SANDBAGS, ETC.) SHALL BE AS INDICATED BY THE SPECIFICATIONS FOR "ROCK FILTER DAMS FOR EROSION AND SEDIMENT CONTROL."
3. THE ROCK FILTER DAM DIMENSIONS SHALL BE AS INDICATED ON THE PLANS.
4. SIDE SLOPES SHOULD BE 2:1 OR FLATTER.
5. ROCK FILTER DAM SHALL BE A MINIMUM OF TWO FEET IN THICKNESS AT TOP OF DAM.
6. FILTER DAMS SHOULD BE EMBEDDED A MINIMUM OF 4" INTO EXISTING GROUND.
7. THE SEDIMENT TRAP FOR PONDING OF SEDIMENT LADEN RUNOFF SHALL BE OF THE DIMENSIONS SHOWN ON THE PLANS.
8. ROCK FILTER DAM SHALL BE SECURED WITH 20 GAUGE GALVANIZED WOVEN WIRE MESH WITH 1" DIAMETER HEXAGONAL OPENINGS. THE AGGREGATE SHALL BE PLACED ON THE MESH TO THE HEIGHT & SLOPE SPECIFIED. THE MESH SHALL BE FOLDED AT THE UPSTREAM SIDE OVER THE AGGREGATE AND TIGHTLY SECURED TO ITSELF ON THE DOWNSTREAM SIDE USING WIRE TIES OR HOG RINGS. IN STREAM USE THE MESH SHOULD BE SECURED OR STAKED TO THE STREAM BED PRIOR TO AGGREGATE PLACEMENT.
9. FLOW OUTLET SHOULD BE ONTO A STABILIZED AREA (VEGETATION, ROCK, ETC.)
10. THE GUIDELINES SHOWN HEREON ARE SUGGESTIONS ONLY AND MAY BE MODIFIED BY THE ENGINEER.

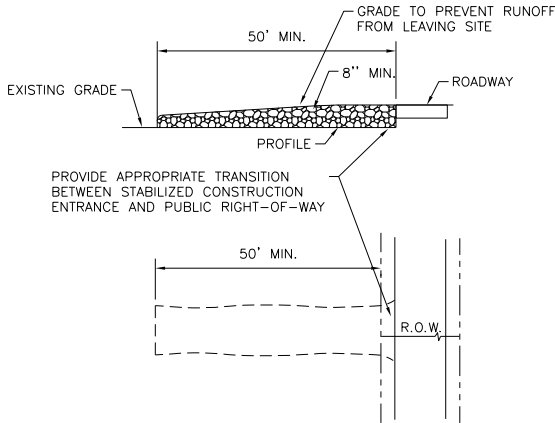

PLAN STABILIZED CONSTRUCTION ENTRANCE


NOT TO SCALE

CONSTRUCTION ENTRANCE NOTES:

1. STONE SIZE: 3-5" OPEN GRADED ROCK.
2. LENGTH: AS EFFECTIVE BUT NOT LESS THAN 50'.
3. THICKNESS: NOT LESS THAN 8".
4. WIDTH: NOT LESS THAN FULL WIDTH OF ALL POINTS OF INGRESS/EGRESS.
5. WASHING: WHEN NECESSARY, VEHICLE WHEELS SHALL BE CLEANED TO REMOVE SEDIMENT PRIOR TO ENTRANCE ONTO PUBLIC ROADWAY. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE AS CONDITIONS DEMAND, AS WELL AS REPAIR AND CLEAN OUT OF ANY MEASURE DEVICES USED TO TRAP SEDIMENT. ALL SEDIMENTS THAT IS SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC ROADWAY MUST BE REMOVED IMMEDIATELY.
6. MAINTENANCE: THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC ROADWAY. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS CONDITIONS DEMAND, AS WELL AS REPAIR AND CLEAN OUT OF ANY MEASURE DEVICES USED TO TRAP SEDIMENT. ALL SEDIMENTS THAT IS SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC ROADWAY MUST BE REMOVED IMMEDIATELY.
7. DRAINAGE: ENTRANCE MUST BE PROPERLY GRADED OR INCORPORATE A DRAINAGE SWALE TO PREVENT RUNOFF FROM LEAVING THE CONSTRUCTION SITE.

NOTES:

1. INSTALL ALL EROSION CONTROLS AT EXISTING GRATE INLETS PRIOR TO COMMENCING CONSTRUCTION.
2. PERIMETER SILT FENCING AROUND INLET LOCATIONS SHALL BE INSTALLED AFTER PIPE IS PLACED.
3. CONTRACTOR IS RESPONSIBLE FOR TAKING MEASURES TO PREVENT CONSTRUCTION MATERIALS FROM ENTERING CORPUS CHRISTI BAY.
4. DAILY INSPECTION SHALL BE MADE BY THE CONTRACTOR AND SILT ACCUMULATION MUST BE REMOVED WHEN DEPTH REACHES 2".
5. CONTRACTOR SHALL MONITOR THE PERFORMANCE OF INLET PROTECTION DURING EACH RAINFALL EVENT AND IMMEDIATELY CLEAN THE INLET PROTECTION IF EXCESSIVE PONDING OCCURS.
6. INLET PROTECTION SHALL BE REMOVED AS SOON AS THE SOURCE OF SEDIMENT IS STABILIZED.

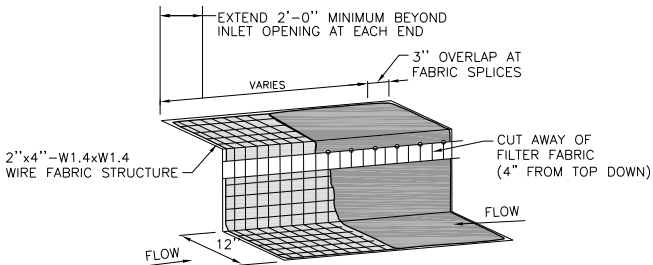

CURB INLET PROTECTION DETAIL

NOT TO SCALE

NOTES:

TYPICAL EROSION CONTROL INSTALLATION AT CURB INLET AFTER PLACEMENT OF CURB AND INLET TOP.

CURB INLET PROTECTION NOTES:

1. TO HOLD THE FILTER DIKE IN PLACE, 20 LB SANDBAGS SHALL BE USED AT 3' O.C. WHERE MINIMUM CLEARANCES CAUSE TRAFFIC TO DRIVE IN THE GUTTER. THE CONTRACTOR MAY SUBSTITUTE A 1"x4" BOARD, SECURED WITH 1/4" OR 3/8" CONCRETE SCREWS. THE 1/4" OR 3/8" CONCRETE SCREWS SHALL BE ATTACHED TO THE GUTTER BY DRILLING AN APPROPRIATE PILOT HOLE WITH A CONCRETE BIT AND INSERT PLASTIC FASTENERS. THE TOP OF THE SCREW SHALL BE RECESSED BELOW THE TOP OF THE BOARD. THE SCREWS SHALL BE PLACED ON 3' O.C. THIS METHOD IS USED IN LIEU OF SANDBAGS. IN THE GUTTER ONLY. TO HOLD THE FILTER DIKE IN PLACE. UPON REMOVAL, EITHER LEAVE THE PLASTIC FASTENERS IN PLACE, OR REMOVE THE PLASTIC FASTENERS, CLEAN ANY DIRT/DEBRIS FROM THE SCREW LOCATIONS, APPLY CHEMICAL SANDING AGENT AND APPLY NON-SHRINK GROUT FLUSH WITH THE SURFACE OF THE GUTTER. THIS METHOD SHALL NOT BE USED ON THE INLET IN LIEU OF SANDBAGS.
2. A SECTION OF FILTER FABRIC SHALL BE REMOVED AS SHOWN ON THIS DETAIL OR AS DIRECTED BY THE ENGINEER OR DESIGNATED REPRESENTATIVE. FABRIC MUST BE SECURED TO WIRE BACKING WITH CLIPS OR HOG RINGS AT THIS LOCATION.
3. DAILY INSPECTION SHALL BE MADE BY THE CONTRACTOR AND SILT ACCUMULATION MUST BE REMOVED WHEN DEPTH REACHES 2". INLET PROTECTION SHALL BE REPLACED AS NECESSARY DURING CONSTRUCTION DUE TO DAMAGE OR DETERIORATION (SUBSIDIARY TO INLET PROTECTION).
4. CONTRACTOR SHALL MONITOR THE PERFORMANCE OF INLET PROTECTION DURING EACH RAINFALL EVENT AND ONLY REMOVE INLET PROTECTION IF DIRECTED BY THE CITY OF CORPUS CHRISTI, OR IF CONTRACTOR OBSERVES AN IMMINENT THREAT OF FLOODING OF SURROUNDING PROPERTY.
5. INLET PROTECTIONS SHALL BE REMOVED AS SOON AS THE SOURCE OF SEDIMENT IS STABILIZED.

THE CITY OF CORPUS CHRISTI STANDARD DETAIL SHEET IS AUTHORIZED FOR USE AS APPLICABLE TO THIS PROJECT BY THE ENGINEER OR ARCHITECT WHO'S SEAL APPEARS ON THIS SHEET. THE ENGINEER/ARCHITECT AFFIRMS THAT THE DETAILS AND NOTES ON THIS SHEET HAVE NOT BEEN ALTERED OTHER THAN TO FILL IN THE PROJECT SPECIFIC INFORMATION IN THE TITLE BLOCK

CONSULTANT'S SHEET No.

CITY of CORPUS CHRISTI
TEXAS
Department of Engineering Services

CITY OF CORPUS CHRISTI
STORM WATER POLLUTION PREVENTION
STANDARD DETAILS

SHEET _____ of _____
RECORD DRAWING NO. _____

CITY PROJECT # _____